


# FireNEX-uLINK-DS™

## User's Manual

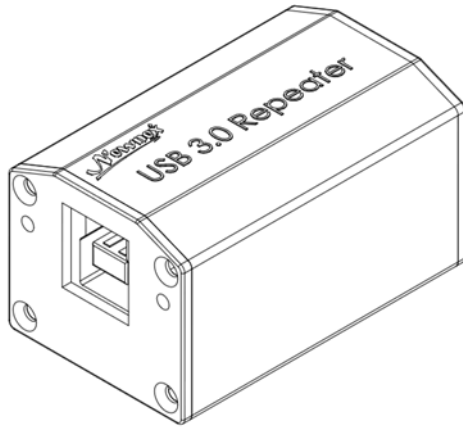

### **Table of Contents**

- 1.0 Introduction
- 2.0 Package Contents
- 3.0 System Requirements
- 4.0 Specifications
- 5.0 Features
- 6.0 Using the FireNEX-uLINK-DS™
- 7.0 Frequently Asked Questions
- 8.0 Return Policy



Connecting with Confidence™

[www.newnex.com](http://www.newnex.com)

## **1.0 Introduction**

Congratulate on your purchase of Newnex FireNEX-uLINK-DSTM USB 3.0 active repeater dongle. The FireNEX-uLINK-DSTM is capable of transmitting USB 3.0 SuperSpeed signals (5Gbps) up to 10 meters, with a maximum of 5 meters in cable length each side.

## **2.0 Package Contents**

- One FireNEX-uLINK-DSTM USB 3.0 active repeater dongle
- One user's manual
- USB 3.0 cables for the FireNEX- uLINK-DSTM could be ordered separately from Newnex.

## **3.0 System Requirements**

- Computer with a USB 3.0 port or/and controller card installed

## **4.0 Specifications**

- Dimensions: 25.4mm x 28.5mm x 47.3mm
- Weight: 48g
- Power Input: 5V - Bus Powered
- Data Rate: Up to 5 Gbps
- RoHS compliant


## **5.0 FireNEX-uLINK-DS™ Features**

- SuperSpeed USB 3.0 at 5 Gbps supported
- USB 2.0 backward compatible
- Bus Powered
- USB3 Vision compliant locking
- Compact size
- Plug and Play

## **6.0 Using the FireNEX-uLINK-DSTM**

It is important to follow the installation procedure for your FireNEX-uLINK-DSTM:

1. Connect a high quality USB A male to B male cable from the host computer to the B-receptacle end of the unit, with a length up to 5 meters.



2. Connect device with one USB cable to the A-receptacle end of the unit, which ups to 5 meters.



## **7.0 Frequently Asked Questions**

- 1. What is the maximum length that the FireNEX-uLINK-DS™ can support?**

Up to 10 meters, 5 meters on each side.

- 2. What is the maximum speed of the FireNEX-uLINK-DS™ ?**

FireNEX-uLINK-DS™ can support data transfer speed up to 5 Gbps as specified by USB 3.0 standard.

- 3. Will it work with USB 2.0 or older version of USB technology?**

Yes. FireNEX-uLINK-DS™ is back ward compatible with USB 2.0 standard.

- 4. Is there a driver for the FireNEX- uLINK-DS™ ?**

No, the FireNEX-uLINK-DS™ does not require any drivers, it is Plug and Play.

## **8.0 Return Policy**

**Warranty:** FIRENEX warranty is valid for one year from the invoice date.

### **FOR PRODUCTS UNDER WARRANTY**

RMA for Purchases Directly from Newnex:

- 1) Please call (408) 986-9988 or e-mail to [RMA@newnex.com](mailto:RMA@newnex.com) to obtain RMA#. RMA# is valid for 15 days from issuing date.
- 2) Please send photos for showing serial numbers and warranty seals to [RMA@newnex.com](mailto:RMA@newnex.com).

*Note: If the warranty seal on the product is broken, the warranty will be void.*

- 3) Please include RMA number on all return packages.

*Notes:*

- a. *Packages that do not have a RMA number will be rejected.*
- b. *Repair service normally takes 2-3 weeks.*

- 4) After Newnex receives your returned RMA products and test them, either of the following action would be taken:
  - a. If the products are defective, Newnex will send you the replacement parts.
  - b. If the returned products are not defective, Newnex will return back to you. You are responsible for round trip shipping costs and \$50 checking and evaluation fee.
  
- 5) For replacement requests before Newnex receives your returned RMA products:
  - a. Your replacement order will be treated as a new order which will include parts and shipping costs. You are responsible to pay for replacement invoices.

This page is intentionally left blank



*Connecting with Confidence™*

Newnex Technology Corp.  
3041 Olcott St.  
Santa Clara, CA 95054, USA Tel. #: (408) 986-9988  
Fax #: (408) 986-8024  
For Technical Assistance: [support@newnex.com](mailto:support@newnex.com)  
[www.newnex.com](http://www.newnex.com)