
NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME	CUSTOMER SIGNATURE	DATE

COMMENTS:

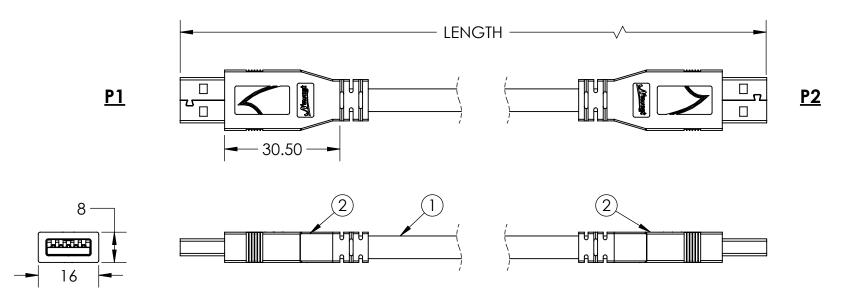

WIRING STRUCTURE				
P1	SIGNAL P2			
-	PWR -			
2	D- 2			
3	D+	3		
4	GND	4		
5	SDP1-	8		
6	SDP1+	9		
7	DRAIN	7		
8	SDP2-	5		
9	SDP2+ 6			
SHELL	BRAID SHELL			

*Both shell clam and copper foil have 360 degree contact with braiding

Notes:

- 1. Cable: USB 3.2 Black PVC Jacket.
- 2. Connector: USB 3.2 A Male.
- 3. Packaging: 1 Piece + PE bag.

Newne	x Technol	ogy Corp.	N'ewnex
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: FRACTIONS DECIMALS ANGLES 1 NA		USB 3.2 A Male to A Male, Cross- over without Vbus	
YYY • 0.050	7/9/2024	DRAWN BY:	APPROVED BY:
PART NUMBER: US2-AA-XX		CHECKED BY:	SHEET 1 OF 1
REVISION COMMENTS:		•	•

*100% OPEN, SHORT, MISWIRE TESTING

*RoHS compliant product

Drawing Generated.