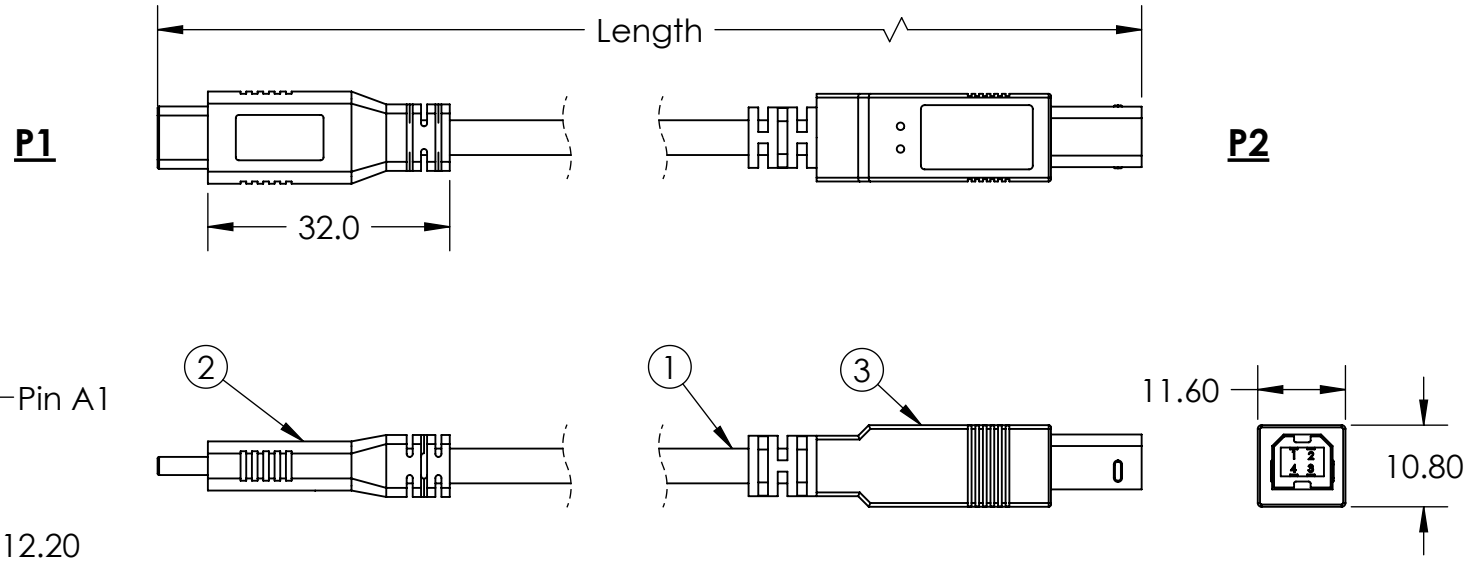


NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME**CUSTOMER SIGNATURE****DATE****COMMENTS:****WIRING STRUCTURE**

P1	Signal	P2
A4,B4,A9,B9	Vcc	1
A5	CC	-
A7	D-	2
A6	D+	3
A1,B1,A12,B12	GnD	4
SHELL	Outer Braid	SHELL

Rd=5.1k Ω **Notes:**

1. Cable: USB 2.0 Black PVC Jacket.
2. Connector: USB Type C Male, Rd=5.1k Ω (Host)
3. Connector: USB 2.0 B Male.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
± NA .X ± 0.2
.XX ± 0.01
.XXX ± 0.005



SCALE: 1:1

REV: A

DATE: 8/10/2026

TITLE: USB 2.0 Type C to B Male,
Black.

DRAWN BY: XW

APPROVED BY:

PART NUMBER: U2S1C21B01-XXX

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS:

Drawing generated

*100% OPEN, SHORT, MISWIRE TESTING

*RoHS compliant product