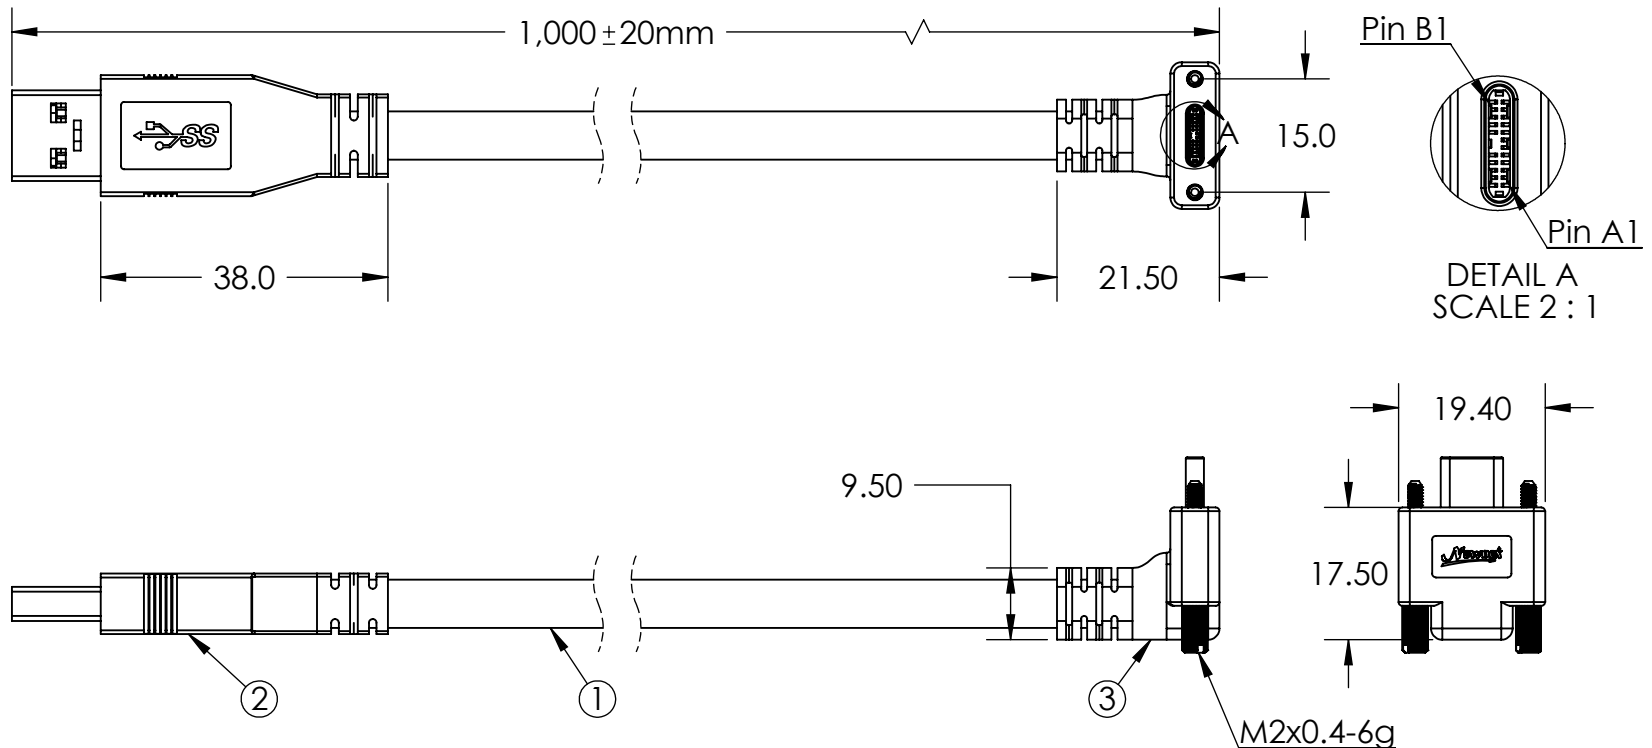


**NEWNEX PROPRIETARY**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

**COMPANY NAME****CUSTOMER SIGNATURE****DATE****COMMENTS:**

WIRING STRUCTURE			
Type C	SIGNAL NAME	A Male	
A4,B4,A9,B9	VBUS	1	
A5	CC	NC	
A7	Dn1	2	
A6	Dp1	3	
A1,B1,A12,B12	GND	4,7	
A3	SDPn1	5	
A2	SDPp1	6	
B10	SDPn2	8	
B11	SDPp2	9	
SHELL	Shield	SHELL	

Rp=56KΩ

**Notes:**

1. Cable: USB 3.1 Black PVC Jacket.
2. Connector: USB 3.1 A Male.
3. Connector: USB 3.1 Type-C Down Angled Male Dual-Screw Locking, with 56k Rp.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES  
• NA XX ± 0.5  
XX ± 0.25  
XXX ± 0.125

PROJ. SCALE: 1:1

REV. A

TITLE: USB 3.1 A Male to C Down Angle Male with Dual-screw Locking, 1M, Black.

DRAWN BY: AC

APPROVED BY: XW

PART NUMBER: U3S1A01C6D-010

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS: Drawing generated

\*100% OPEN, SHORT, MISWIRE TESTING

\*RoHS compliant product

\*Both shell clam and copper foil have 360 degree contact with braiding