
NEWNEX PROPRIETARY

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME	CUSTOMER SIGNATURE	DATE

COMMENTS:

*RoHS compliant product

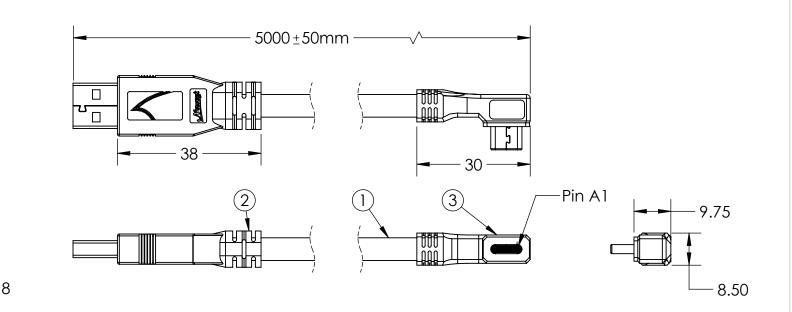

WIRING STRUCTURE		
SIGNAL NAME	Type C	
VBUS	A4,B4,A9,B9	
CC	A5	
Dn1	A7	
Dpl	A6	
GND	A1,B1,A12,B12	
Drain	SHELL	
Braid	,SIILLL	
SDPn1	A3	
SDPp1	A2	
SDPn2	B10	
SDPp2	B11	
	SIGNAL NAME VBUS CC Dn1 Dp1 GND Drain Braid SDPn1 SDPp1 SDPp2	


*100% OPEN, SHORT, MISWIRE TESTING

16

Notes: Rp=56K

Cable: USB 3.2 Cable. Connector: USB A Male.

Connector: USB Angled Type C Male Packaging: 1 Piece + PE bag.

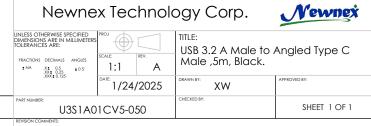

*Both shell clam and copper foil have 360 degree contact with braiding

Drawing generated