NEWNEX PROPRIETARY
THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME	CUSTOMER SIGNATURE	DATE

COMMENTS:

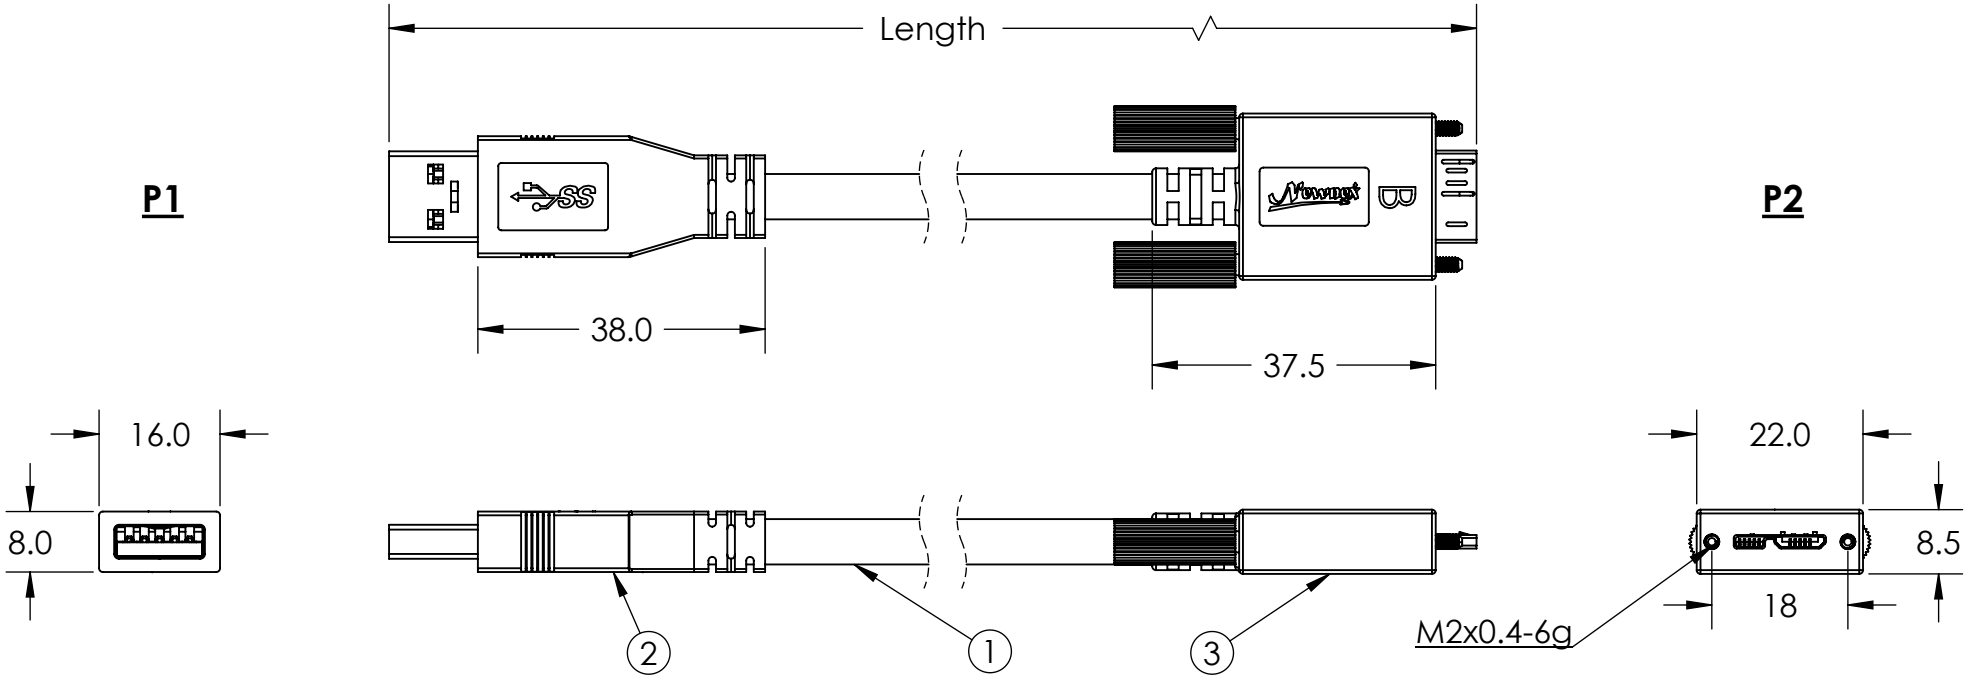

WIRING STRUCTURE		
P1	SIGNAL	P2
1	PWR	1
2	D-	2
3	D+	3
4	GND	5
5	SDP1-	6
6	SDP1+	7
7	DRAIN	8
8	SDP2-	9
9	SDP2+	10
SHELL	BRAID	SHELL

Notes:
1. Cable: USB 3.2 Black PVC Jacket.
2. Connector: USB 3.2 A Male.
3. Connector: USB 3.2 Micro B Male Locking.
4. Packaging: 1 Piece + PE bag.

*100% OPEN, SHORT, MISWIRE TESTING

*RoHS compliant product

*Both shell clam and copper foil have 360 degree contact with braiding

Newnex Technology Corp.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:
FRACTIONS ± NA | DECIMALS .X± 0.5, .XX± 0.25, .XXX± 0.125 | ANGLES ± 0.5°

PROJ

TITLE: USB 3.2 A Male to Micro B Male with Locking, Black.

SCALE: 1:1 | REV. A

DATE: 5/30/2014

DRAWN BY:

APPROVED BY:

PART NUMBER: US2-AMCBI1-XX

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS:
Drawing generated