

**NEWNEX PROPRIETARY**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

**COMPANY NAME**



**CUSTOMER SIGNATURE**

**DATE**



**COMMENTS:**

**P1**

**P2**

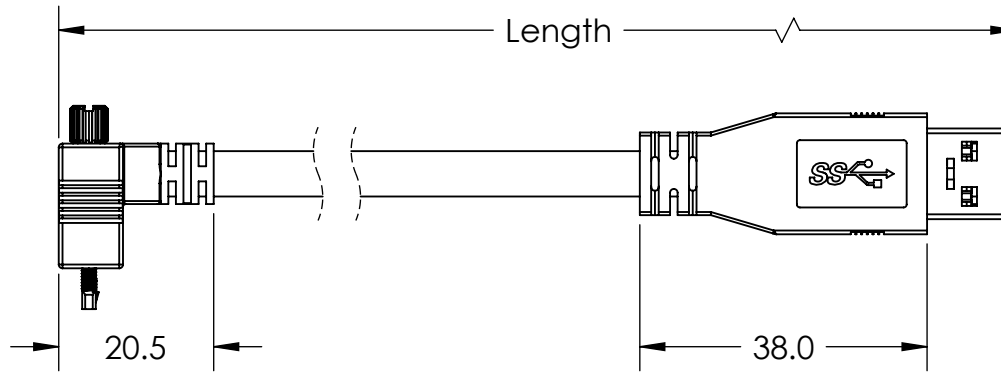

M2\*0.4-6g

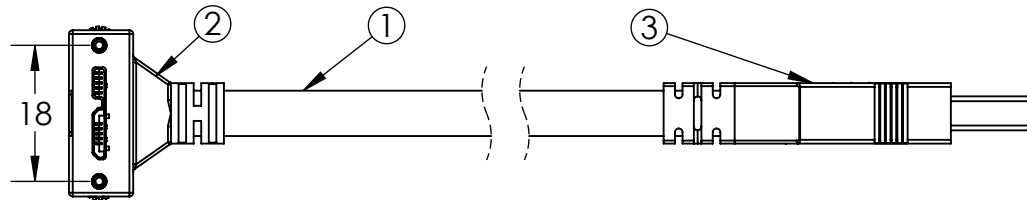

**WIRING STRUCTURE**

P1	SIGNAL	P2
1	PWR	1
2	D-	2
3	D+	3
5	GND	4
6	SDP1-	5
7	SDP1+	6
8	DRAIN	7
9	SDP2-	8
10	SDP2+	9
SHELL	BRAID	SHELL

**Notes:**

1. Cable: USB 3.2 Black PVC Jacket.
2. Connector: USB 3.2 Angled Micro B Male Locking.
3. Connector: USB 3.2 A Male.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES  
 # NA XX ± 0.5 ± 0.5°  
 .XX ± 0.25 .XX ± 0.125

PROJ: [Symbol] TITLE: USB 3.2 Angle Micro B Male Locking to A Male, Black.

SCALE: 1:1 REV: A

DATE: 4/9/2026

DRAWN BY: XW

APPROVED BY:

PART NUMBER: US2-AMCBR3I-XX

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS:

- \*100% OPEN, SHORT, MISWIRE TESTING
- \*RoHS compliant product
- \*Both shell clam and copper foil have 360 degree contact with braiding