

NEWNEX PROPRIETARY


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WITHIN IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF NEWNEX

COMPANY NAME





CUSTOMER SIGNATURE

DATE

COMMENTS:

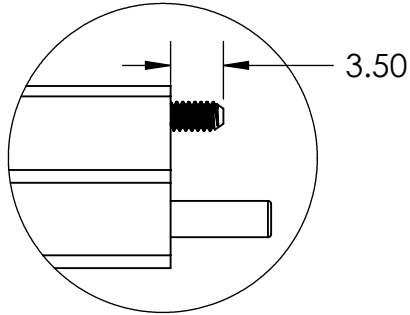

DETAIL A
SCALE 2 : 1

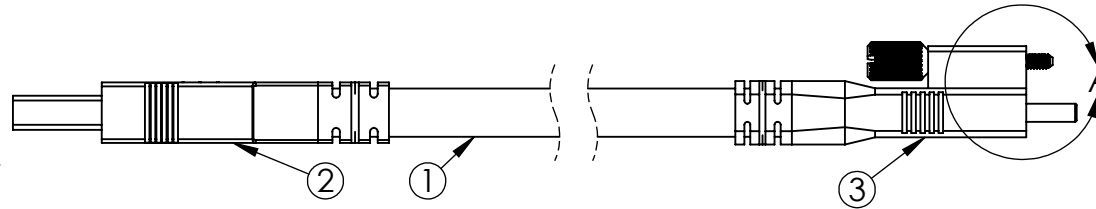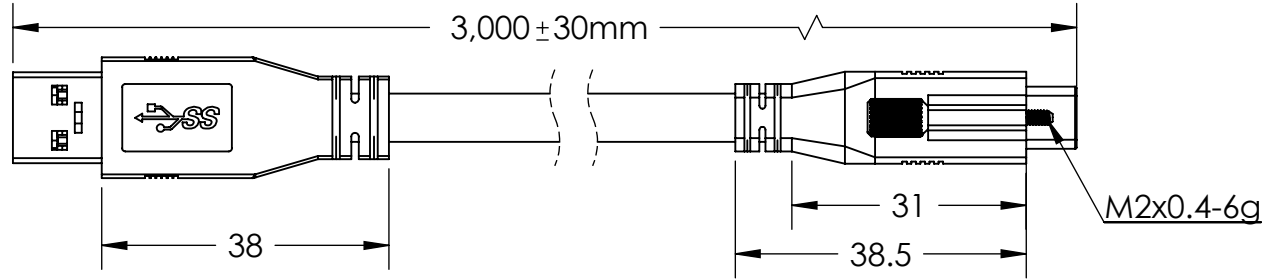

WIRING STRUCTURE

Rp=56KΩ

Type C	SIGNAL NAME	A Male
A4,B4,A9,B9	VBUS	1
A5	CC	NC
A7	Dn1	2
A6	Dp1	3
A1,B1,A12,B12	GND	4,7
A3	SDPn1	5
A2	SDPp1	6
B10	SDPn2	8
B11	SDPp2	9
SHELL	Shield	SHELL

Notes:

1. Cable: USB 3.1 Gen 1, Black PVC Jacket
2. Connector: USB 3.1 Gen 1 A Male
3. Connector: USB 3.1 Gen 1 Type-C Male Single Screw Locking with Rp.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
 • NA XX ± 0.25 ± 0.5°
 XXX ± 0.125

PROJ: [Symbol] TITLE:

SCALE: 1:1 REV: A

TITLE: USB 3.1 A Male to C Male with Single screw locking, 3M, Black

DATE: 12/10/2018

DRAWN BY: XW

APPROVED BY: ZL

PART NUMBER: U3S1A01C14-030

CHECKED BY:

SHEET 1 OF 1

REVISION COMMENTS: